

Datasheet

VIDEO ENTRY/ CDV-ACCS - Multi entrance system converter

Product description

The CDV-ACCS takes the information from the proximity cards & tags read on the 2EASY door station and converts it to Wiegand format.

It allows to connect the 2EASY range with the ATRIUM and CENTAUR access control systems.




Key features

- Addressable Wiegand output module for [CDV-97](#) & [CDV-DDP](#) entry panels
- Extracts Wiegand data from 2EASY bus ([CDV-DDP](#) & [CDV-97iD](#) only)
- Address can be set to match entry panel address allowing up to 4 panels with readers

 *Certification*

 *DEEE*

 *Certification*


 *-10°C to 40°C*

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - April 2020 - CDVI_CDV-ACCS_DS_02_EN_A4_C

Electrical Specifications

Wiegand Output: 26 bits

Power: 2Easy BUS connection
(door station BUS, in line)

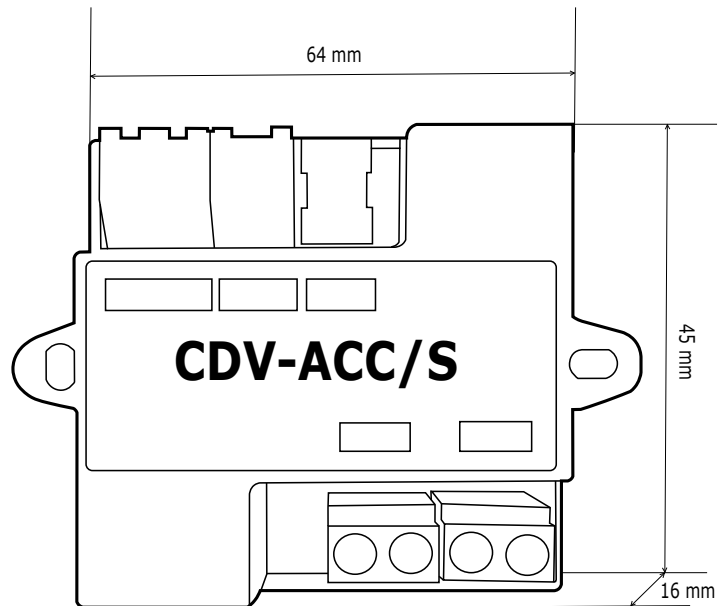

All the information contained within this document (pictures, drawing, features, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - April 2020 - CDVI_CDV-ACC_DS_02_EN_A4_C