



HD ONVIF | S | G | Q

HBW2GR3V/HBW2GR1V/HBL2GR1V

Network TDN Low-Light WDR 2MP IR Rugged Bullet

OPERATIONAL	
VIDEO STANDARD	NTSC/PAL
SCANNING SYSTEM	Progressive scan
IMAGE SENSOR	1/2.8" 2Megapixel progressive scan CMOS
NUMBER OF PIXELS (H x V)	2MP - 1920x1080
MINIMUM ILLUMINATION	Colour: 0.001Lux @f/1.6, B/W: 0Lux @f/1.6 (IR on)
S/N RATIO	50db minimum
ELECTRONIC SHUTTER SPEED	Auto/Manual, 1/3(4) - 1/10000ths
IR DISTANCE	60m
DAY/NIGHT	Mechanical ICR (ON / OFF / AUTO selectable)
BACKLIGHT COMPENSATION	BLC / HLC / WDR / SAC (Scene Adaptive Control)
WIDE DYNAMIC RANGE (WDR)	HBW2GR1V: 140dB (50/60fps off) HBW2GR1V/HBW2GR3V: 120dB (50/60fps off)
WHITE BALANCE	Auto/Natural/Street Lamp/Outdoor/Manual/Customize Region
GAIN CONTROL	Auto/Manual
NOISE REDUCTION	3DNR
PRIVACY MASKING	4 configurable windows
ELECTRONIC IMAGE STABILIZATION	HBW2GR3V, HBW2GR1V: Not supported HBL2GR1V: OFF/ON
DEFOG	Auto/Manual/Off
LENS	HBW2GR3V: 5-60mm MFZ, HALL IRIS (Extended Focal Depth), optical zoom 12x lens F1.6
	HBW2GR1V: 2.7-13.5 mm MFZ, DC IRIS, optical zoom 5x lens F1.6
	HBL2GR1V: 2.7-12 mm MFZ, HALL IRIS (Extended Focal Depth), optical zoom 4x lens F1.6
ANGLE OF VIEW	HBW2GR3V: H: 62° - 6°, V: 34° - 4°
	HBW2GR1V: H: 110° - 32°, V: 59° - 19°
	HBL2GR1V: H: 102° - 35°, V: 54° - 21°
AUDIO/TWO-WAY	Line In/Out
ALARM INPUT/OUTPUT	2 In / 1 Out
ANALOG OUTPUT SUPPORT	Twin outputs (for adjustment only)
ETHERNET	HBW2GR3V, HBW2GR1V: RJ-45 (10/100Base-T) HBL2GR1V: RJ-45 (100/1000Base-T)
IP SPECIFICATIONS	
VIDEO COMPRESSION	H.265+, H.265, H.264 and MJPEG bit rate control (CBR and VBR)
RESOLUTION	16:9 1080p (1920x1080)/ 720p (1280x720)
	4:3 1.3M (1280x960)/VGA (640x480)
	OTHER D1 (704x576/704x480)/ CIF (352x288/352x240)
FRAME RATE	MAIN STREAM 1080P (1-50/60fps WDR off)
	SUB STREAM D1 (1-50/60fps WDR off)
	THIRD STREAM HBW2GR3V, HBW2GR1V: 1080P (1-25/30fps) HBL2GR1V: 1080P (1-50/60fps WDR off)
	HBW2GR3V, HBW2GR1V: Simultaneous Main stream and Third stream at 1080P (Main stream +Third stream <=68fps, WDR off, 2nd stream off) HBL2GR1V: Simultaneous Main stream and Third stream at 1080P (Main stream at 50/60fps WDR off, Third stream at 50/60fps WDR off)
AUDIO COMPRESSION	G.711a/ G.711Mu/ AAC/G.726
AUDIO STREAM	Full duplex, simplex
SUPPORTED WEB BROWSERS	IE11/Chrome (with application)/Firefox (earlier than 52.0 version)
SUPPORTED OS	Windows® 7 32-bit/64-bit; Windows® 10 32-bit/64-bit

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.


IP SPECIFICATIONS		
SUPPORTED PROTOCOLS*	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; SNMP	
COMPATIBILITY	ONVIF Profile S, G and Q	
MAXIMUM USERS ACCESS	20 users	
SECURITY	User account and password protection HTTPS, IP Filter, IEEE 802.1x, Digest authentication, User access log, TLS1.2, AES-256, SSH/Telnet closed, FTP disabled, PCI-DSS compliance, Hardware chipset for private key	
HEAT MAP	HBL2GR1V: Support	
BUILT-IN ALARM & EVENT	EVENT TYPE	HBW2GR1V/HBW2GR3V: Motion Detection/Video Tampering/Face Detection/SD Card Error/SD Card Capacity Warning/Audio Detection/Object Abandoned/Object Missing/Tripwire/Intrusion HBL2GR1V: Motion Detection/Video Tampering/Face Detection/SD Card Error/SD Card Capacity Warning/Audio Detection/Object Abandoned/Object Missing/People counting
	EVENT LINKAGE	Recording on SD card, Relay output, Email, Snapshot
	EVENT OUTPUT	ONVIF, ISOM
UPLOADABLE VIDEO ANALYTICS (HBL2GR1V ONLY)	BASIC	Trigger line/Intrusion/Loitering available now (Please download from www.honeywellvideo.com . Free of Charge, but please email to VALicensing@Honeywell.com to get license.)
	ADVANCED LICENSED ANALYTICS	IntrusionTrace/LoiterTrace for advanced applications coming soon. (Need to purchase separately)
	ANALYTICS OUTPUT	ISOM event output, Metadata
MICRO SD	Micro SDHC Capacity Max 32GB Micro SDXC Capacity Max 128GB	
MICRO SD FUNCTION	Event trigger recording; Continuous and scheduled recording; Automatic recording when network fails	
LANGUAGES SUPPORTED	English, Arabic, Czech, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Turkish	
ELECTRICAL		
POWER SUPPLY	PoE+ (802.3at) Class 4/12VDC/AC24V	
LONG DISTANCE POE SUPPORT	3X POE (300m @100Mbps)	
AC FREQUENCY	50/60 Hz	
POWER CONSUMPTION	HBW2GR3V: Max 17.3W; HBW2GR1V: Max 20.5W HBL2GR1V: Max 17W	
AUXILIARY POWER SUPPLY	2.0W, DC12V (+/-5%)	
MECHANICAL		
DIMENSIONS	11.1 x 4.3 in. (281.0 x 110.0 mm)	
WEIGHT	Product weight: 4.70lb (2.130g) Package Weight: 6.28lb (2847g)	
CONSTRUCTION	Die-cast aluminum housing with powder coat	
CONSTRUCTION COLOR	RAL 9003 (White) and RAL 7022 (Grey)	
ENVIRONMENTAL		
OPERATING TEMPERATURE	-40°F to 140°F (-40°C to 60°C)	
RELATIVE HUMIDITY	0% to 95%, non-condensing	
GORE VENTS	Yes	
INGRESS PROTECTION	IP 67	
IMPACT RESISTANCE	IK10	
HEATER, FAN OPTION	Heater	
REGULATORY		
EMISSIONS	FCC Part 15, CE (EN 55032); Complies with RCM (AS/NZS)	
IMMUNITY	CE (EN 50130-4)	
SAFETY	North America UL Listed to UL/CSA 60950-1, CE (EN 60950-1); North America UL Listed to UL/CSA 60950-22, CE (EN 60950-22)	
ROHS	EN50581	

Network TDN Low-Light WDR 2MP IR Rugged Bullet

RECOMMENDED ACCESSORIES

SYSTEM INTEGRATION

ONVIF support and open API software integration. Refer to www.onvif.org for the ONVIF specification and the Honeywell Open Technology Alliance website (<http://www.security.honeywell.com/hota/>) to learn more about our open and integrated solutions.



HOUSING AND MOUNTS


HB4G-PM		Pole Mount Adapter
HB34G-CM		Corner Mount Adapter
HBG-BB		IP66 Back Box with Gasket (for Cable Termination)
HBG-FP		Front Lens Plate Replacement (if Vandalized)
HLR1001		IP over Coax Converter
HPOE3X		3X Long Distance POE Switch

ORDERING

HBW2GR3V	Network TDN Low Light WDR IR Bullet Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 5-60 mm MFZ, 4 IR LEDs, PoE+, H.265.
HBW2GR1V	Network TDN Low Light WDR IR Bullet Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 2.7-13.5 mm MFZ, 4 IR LEDs, PoE+, H.265.
HBL2GR1V	Network TDN Intelligent Ultra WDR IR Bullet Camera, 1/2.8" 2 Megapixel progressive scan CMOS, 2.7-12 mm MFZ, 4 IR LEDs, PoE+, H.265

DIMENSIONS

* DIMENSIONS DRAWING SHOWS BACK BOX.

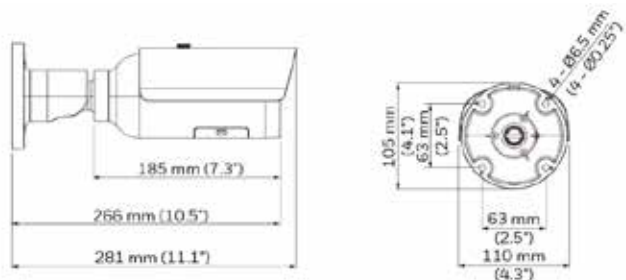


For more information

www.honeywell.com/security/uk

Honeywell Security

Aston Fields Road
Whitehouse Industrial Estate
Runcorn, Cheshire, WA7 3DL
United Kingdom
Tel: +44 (0)8448 000 235

Honeywell Security Office
Emaar Business Park, Sheikh Zayed Road
Building No. 2, 2nd floor, 201
Post Office Box 232362
Dubai, United Arab Emirates
Tel: +971 44541704
www.honeywell.com

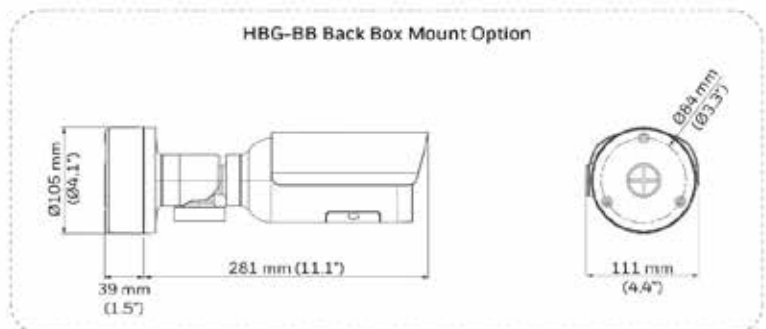

ONVIF and the ONVIF logo are trademarks of ONVIF Inc. Honeywell reserves the right, without notification, to make changes in product design or specifications.

HSV-HBx2GRxV-01-UK(0618)DS-Z
© 2018 Honeywell International Inc.

Honeywell