


**UT9200****ULTRA MODULE FOR UT9211, UT9212 BUTTONS**

Call button module for Ultra entrance panel, compatible with all systems. With facility for 8 call buttons in professional-grade plastic given an anti-yellowing and anti-dulling treatment or in aluminium. For completion with 4 single buttons art. UT9211, UT9211M, UT9211FM (4 calls), 4 double buttons art. UT9212, UT9212M, UT9212FM (8 calls) or with caps art. UT9221, UT9221M, UT9222, UT9222M, UT9223, UT9223M. Automatic nameplate backlight switch-off during daytime hours via the twilight sensor for the paired audio or audio/video module. White nameplate lighting. Dimensions (L x H x D): 100 x 90 x 35 mm.

AWARDSDESIGN
MILANO

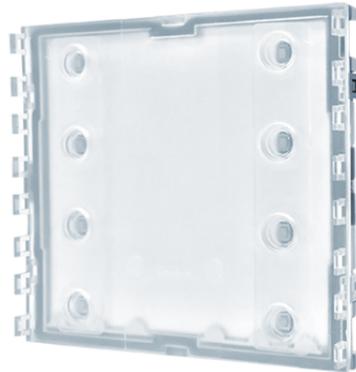

UT9200

ULTRA MODULE FOR UT9211, UT9212 BUTTONS

GENERAL DATA

Type	Modular
Height (mm)	90
Width (mm)	100
Depth (mm)	35
Product color	Transparent
Flush-mounted	Yes, with a dedicated accessory
Wall-mounted	Yes, with a dedicated accessory

COMPATIBLE SYSTEMS

Audio/video Simplebus 2 with power supply art. 4888C	Yes
Audio/video Simplebus 2 with power supply art. 1210/1210A	Yes
Audio Simplebus 2 with power supply art. 1210/1210A	Yes
Audio/video Simplebus 1	Yes
Audio Simplebus 1	Yes
ViP	Yes

ELECTRICAL CHARACTERISTICS

Type of power supply	Power supply from video door entry bus
Supply voltage	33VDC
Absorption in stand-by (W)	0.4
Maximum absorption (W)	0.4

HARDWARE FEATURES

Call type	Push-buttons
Type of buttons	Mechanical
Number of push-buttons (n°)	8
Backlight colour	White, Off



UT9200

ULTRA MODULE FOR UT9211, UT9212 BUTTONS

SETTINGS

Backlight brightness	Yes
----------------------	-----

ENVIRONMENTAL AND COMPLIANCE FEATURES

Operating temperature (°C)	-25 ÷ 55
Operating humidity (RH max) (%)	25 ÷ 95
Environmental class	IV
CE certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)