

# Ganz Genstar IP Bullet Serie




Whether equipped with a varifocal lens with 3-12mm or a fixed lens with 3.6mm: Both IP Bullet Cameras are conceived and designed for outdoor use. Furthermore, they also feature IR LEDs and ensure clear visibility even in complete darkness. Various image-enhancing functions access especially in difficult ambient conditions.

- H.264 & MJPEG
- 3.6mm fix / 3.0mm - 12mm vario
- DWDR
- 1/3" CMOS
- Full-HD with up to 30 Frames / Sec
- Integrated IR-LEDs
- 4 Megapixel

## Order data

| Order number | Product description                                                                                                                                                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ZN8-BANVF59  | H.264 4 Megapixel, 3.0mm - 12mm, mechanical Day/Night switching, max. 30fps, IR-LEDs 20-25m, DWDR, AGC, DIS, POI, 2/3DNR, 12VDC / PoE, 264.5mm (H) x 80.3mm (Ø), 780g |
| ZN8-NANFN4   | H.264 4 Megapixel, 3.6mm, mechanical Day/Night switching, max. 30fps, IR-LEDs 20-30m, DWDR, AGC, DIS, POI, 12VDC / PoE, 169(B) x70(H) x60(T), 631g                    |


# Ganz Genstar IP Bullet Serie



| Technical specifications | ZN8-BANVF59                                                                    | ZN8-NANFN4             |
|--------------------------|--------------------------------------------------------------------------------|------------------------|
| Image sensor             | 1/3" CMOS                                                                      |                        |
| Compression format       | H.264, MJPEG                                                                   |                        |
| Triplestream             | Yes, configurable                                                              |                        |
| Resolution options       | 2688*1520/2560*1440/15fps, 2304*1296/20fps, 1920x1080/30fps                    |                        |
| Video framerate          | max. 30fps Full-HD                                                             |                        |
| Lens                     | 3.0mm - 12mm, 87° - 35°                                                        | 3.6mm, 75°             |
| Day/night switching      | Mechanical                                                                     |                        |
| Minimum illumination     | 0.05 Lux (Color, AGC on), 0 Lux (IR on)                                        |                        |
| IR                       | Yes (Smart IR), 20-25m                                                         | Yes, 20-30m            |
| DNR                      | Yes, 3DNR                                                                      | Yes, 2/3DNR            |
| WDR                      | Yes, DWDR                                                                      |                        |
| HLC                      | Yes                                                                            |                        |
| Network interface        | 10 / 100 Base-T                                                                |                        |
| Protocols                | HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, PPoE, Unicast / Multicast, ONVIF |                        |
| DIS                      | Yes                                                                            |                        |
| ROI                      | Yes                                                                            |                        |
| Interfaces               | RJ-45, BNC                                                                     |                        |
| Micro SD-Card            | Yes (up to 64GB, optional)                                                     | -                      |
| Operating voltage        | PoE / 12VDC                                                                    | PoE / 12VDC            |
| Power consumption        | 5.5W max.                                                                      | 5W max.                |
| Protection class         | IP66                                                                           |                        |
| Operating environment    | -20°C - 60°C                                                                   | -20°C - 55°C           |
| Dimensions               | 264.5mm (H) x 80.3mm (Ø)                                                       | 169(W) x 70(H) x 60(D) |
| Weight                   | 780g                                                                           | 631g                   |

# Ganz Genstar IP Bullet Serie

## ZN8-BANVF59

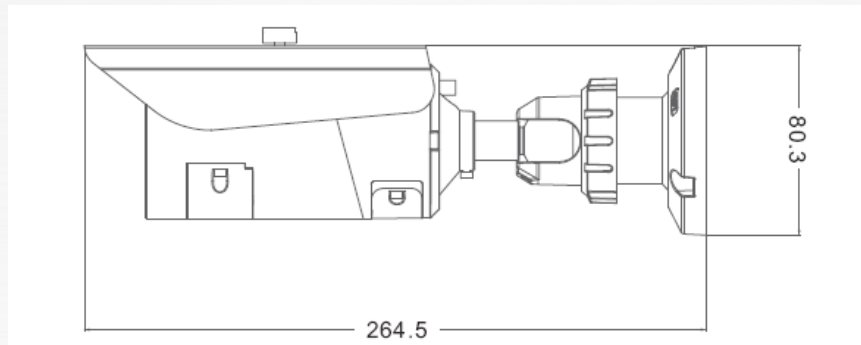

## ZN8-NANFN4

