




IP4GESP

4 Port Gigabit Ethernet Switch

The IP4GESP is a unmanaged ethernet switch designed for Gigabit Ethernet access and PoE powered network. It provides four Gigabit Ethernet ports, dual Gigabit uplink port.


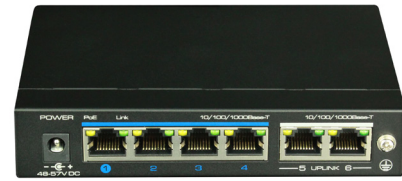


IP4GESP

Key Features

- Supports x4 Gigabit 10/100/1000 downlink ports and x2 Gigabit uplink ethernet ports.
- Power Input: DC48V - 57V
- Transmission Distance 0-100m
- Easy Plug and Play Installation (Wall, Din Rail and Rack)
- Designed for CCTV applications
- Supports PoE and PoE+ Products
- 6kv Surge Protection

Dimensions (mm)

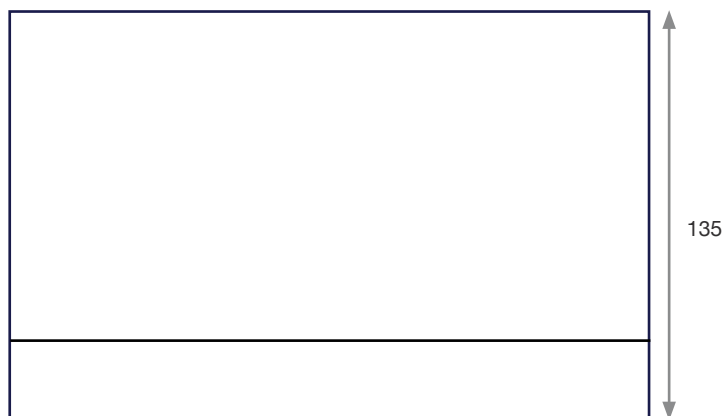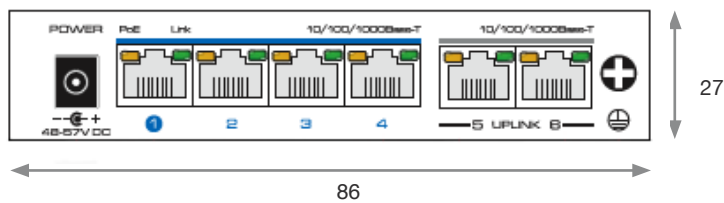



Technical Specification

Model Number	IP4GESP
Power Supply	Power Adaptor
Voltage Range	DC48V- 57V
Power Consumption	60W
Ports Ethernet	1-4 Downlink Ports: 10/100/1000 Mbps PoE Ethernet Ports 5-6 Uplink Ports: 10/100/1000 Mbps Ethernet Ports
Transmission Distance	0-100m
PoE Standard	IEEE802.3, af, IEEE802.3 at, End-span
PoE Power Supply	Each Port ≤ 30W, Total <60W
Network Standard	IEEE 802.3, IEEE 802.3u, IEEE802.3ab
Pack Forwarding Rate	8.39 Mpps
Switching Capacity	12G
Packet Data Cache	1Mb
MAC Table	8K
Mode Function	a. All Downlink Port, Can only communicate with uplink, Ports,
Power Input	x1 Red Light
One key CCTV	x1 Green Light, Solid on after CCTV Mode on
Downlink Ports	Link: Green LED (on RJ45) PoE: Yellow LED (on RJ45)
Uplink Ports	Link: Green LED (on RJ45) Acting: Yellow LED (on RJ45)
Lighting Protection	6KV, Per: IEC610000-4-5
ESD Protection	Level 3, 1a Contact Discharge Level 3, 1b Air Discharge Per: IEC61000-4-2
Operation Temperature	-10°C to 45°C
Storage Temperature	-40°C to 85°C
Humidity (Non-Condensing)	0-95%
Dimensions (LxWxH)	135 mm x 86mm x 27mm
Material	Metal
Colour	Black
Weight	343g

Genie CCTV reserves the right to change specifications without notice. Please contact your representative to confirm current specifications.

