8 Channel
4K PoE NVR

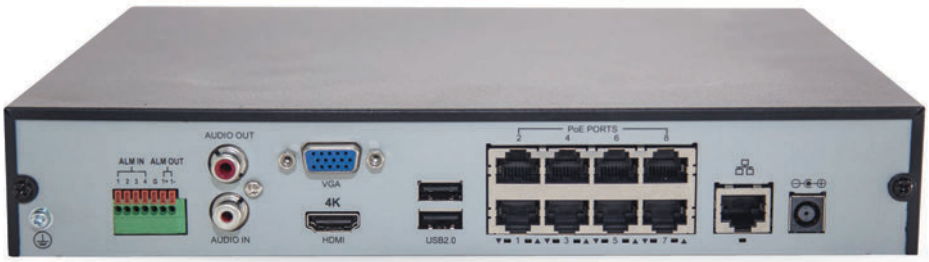

UNVR302-08E-P8

KEY FEATURES

4K Sentinel ONVIF

- 8 channel input
- Third-party IP cameras supported with ONVIF conformance
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- Up to 12 Megapixels resolution recording
- Support H.265/H.264 video formats
- Accurate retrieval, instant playback
- Up to 8TB for each disk
- Support various VCA detection alarm and VCA search
- Plug & Play with up to 8/16 independent PoE network interfaces
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

DIMENSIONS

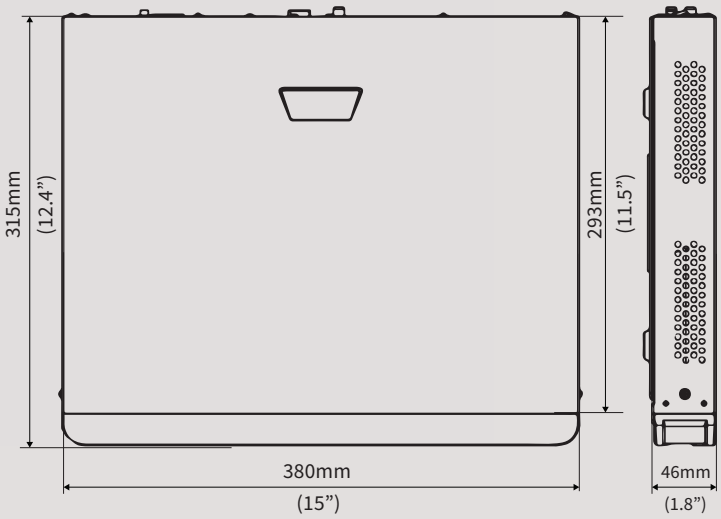

Software Interface Mobile & CMS

CMS Menu

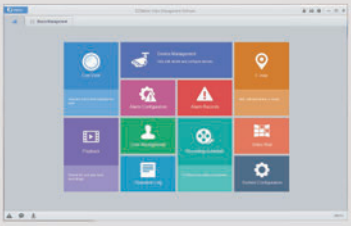

Playback

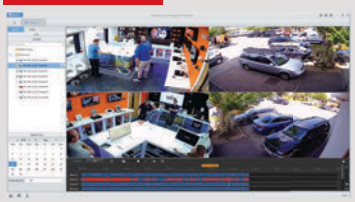

Mobile app

Playback /Live View

Uniview Technologies trading as UNV.
This specification sheet has been produced by CCTVdirect, leading UNV distributor, therefore, reproduction of this material is prohibited without written consent.

SPECIFICATION

Model	UNVR302-08E-P8
Video/Audio Input	
IP Video Input	8-ch
Two-way Audio Input	1-ch, RCA
Network	
Incoming Bandwidth	80Mbps
Outgoing Bandwidth	160Mbps
Remote Users	128
Video/Audio Output	
HDMI/VGA Output	HDMI: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Decoding	
Compression	H.265/H.264
Live view/ Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 12MP@20, 4 x 4K@30, 8 x 4MP@20, 16 x 1080P@25
Hard Disk	
SATA	2 SATA interfaces
Capacity	up to 8TB for each disk
External Interface	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0
Alarm In	4-ch
Alarm Out	1-ch
PoE	
Interface	8 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port
	Max 130W in total (16.25W for each)
Supported Standard	IEEE 802.3af/at
General	
Power Supply	100 ~ 240 VAC
Consumption (without HDD)	≤ 20 W
Working Temperature	-10°C ~ + 55°C (+14°F ~ +131°F)
Working Humidity	10% ~ 90%
Dimensions	380 mm × 315mm × 46 mm
Weight (without HDD)	≤2.42kg (5.34lb)

"Best value NVR in the UK"

Uniview Technologies trading as UNV.
This specification sheet has been produced by CCTVdirect, leading UNV distributor, therefore, reproduction of this material is prohibited without written consent.