

## Datasheet


### RECEIVERS/ RX39-433i - Fixed code 2 relays receiver

#### Product description

The RX39-433i is a 2 channel receiver which offers standard operation from fixed code transmitters, compatible with all TX39 transmitters from CDVI.

It is part of a complete range of radio control and switching products to provide wire-free control of gates, barriers, doors, lights etc.

Standard range is up to 200 metres. It can be increased with the optional SEA433 tuned aerial.

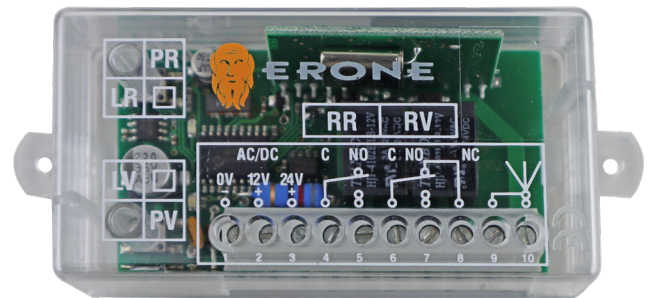


#### Key features

- 2-channel receiver
- Up to 100 transmitter memory capacity
- Transparent housing
- Fixed code
- For internal use only

 *Certification*

 *DEEE*

**RoHS** *Certification*

 *-20°C to 70°C*

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - March 2020 - CDVI\_RX39-433i\_DS\_02\_EN\_A4\_C

## Product Information

**Material:** Polycarbonate housing

**Frequency:** 433.92MHz

**Modulation:** AM/ASK

**Encoding:** Fixed Code

**Relays:** 2, NO and NO/NC

**Memory capacity:** 100 transmitters & codes

## Electrical specifications

**Power supply:** 12 or 24 Vac/dc

**Max power on relay output:** 24VA

**Consumption:**

Standby: 25mA

Working: 55mA (max)

